







Alarms & Controls

Alarms (High Water Alarm)

AC-A-I

Features

- High water alarm for indoor use only
- Red warning light, green "power on" light, alarm test switch, and horn silence switch
- Includes mercury float
- 6' power cord

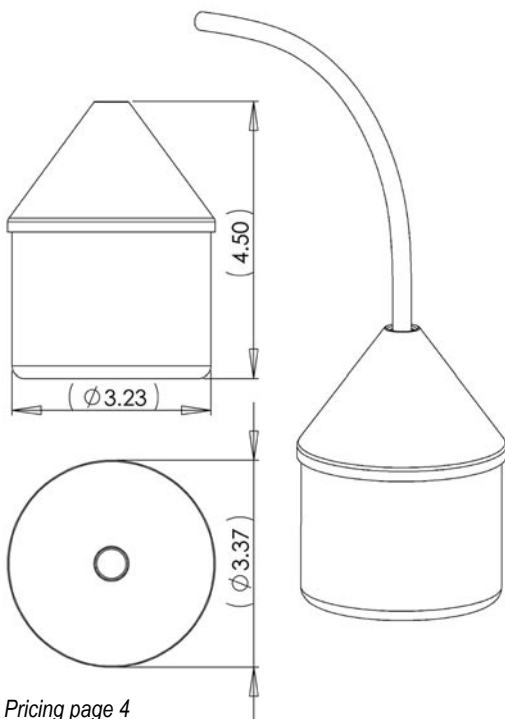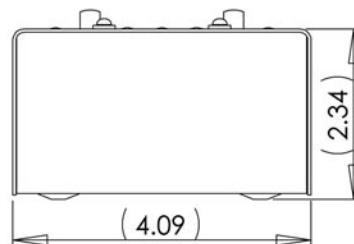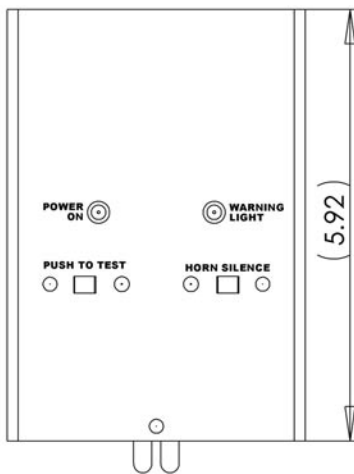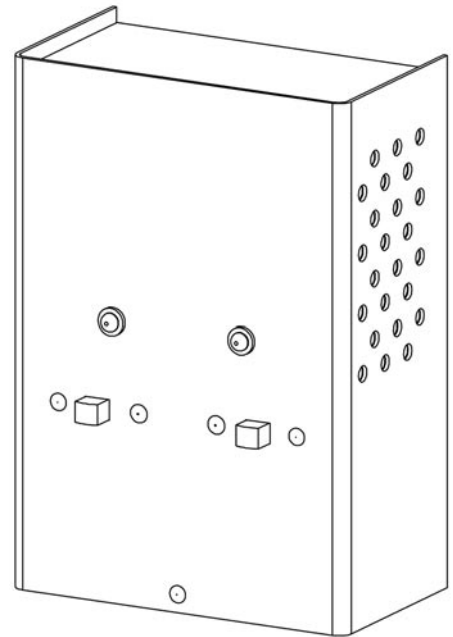

Specifications

Power

- Primary 120 VAC, 50/60 Hz, 6.5 watts max. (alarm condition).
- Secondary 12 VAC

Alarm enclosure

- 6x4x2.5 inch (15.24x10.16x6.35 cm), NEMA 1 metal. Includes outside mounting device, which eliminates the need to open the enclosure.

Alarm horn

- 86 decibels at 10 feet

Power cord

- 6 foot

Float switch connection terminal

- For float switch connection only. Do not apply power. (Voltage across terminals is 12 VAC).

Switch

- Mercury float switch with 15' cord

Warranty for Defects in Material and Workmanship

- AC-A-I - 3 Years

AutoCad dwg files at www.quanics.net

1-877-QUANICS - www.quanics.net

Quanics
Engineering Water Solutions®

© 2007, Quanics Inc. All rights reserved.
Product(s) covered by one or more U.S.
and/or International patents. Other U.S. and
International patents may be pending.

DOWNLOAD
AutoCAD
DRAWINGS