




Alarms & Controls Control Panel AC-CP-D-C

Features

- Duplex alternating control for 120/208/240 pumps
- Magnetic motor contactor pump control
- Includes lag/alarm, lead, stop floats
- Audible and visual alarm
- HOA switch for manual pump control
- Separate pump and alarm circuit terminal blocks
- Circuit breaker provides pump disconnect and branch circuit protection



Standard Float Configuration

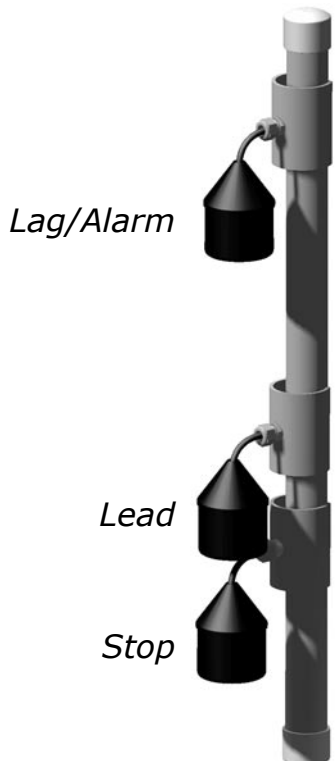

Specifications

Enclosure

- Measures 12x10x6 inches (30.48x25.4x15.24 cm). NEMA 4X (ultraviolet stabilized thermoplastic with removable flanges for outdoor or indoor use).
- Magnetic motor contactor controls pumps by switching hot electrical lines
- HOA switch for manual pump control (mounted on circuit board)
- Green pump run indicator light (mounted on circuit board)
- Control circuit board provides pump control and alternation (U.S. patent 5,909,352)
- Pump input power and pump connection terminal block
- Ground lug
- Circuit breakers provide pump disconnect and branch circuit protection
- Float status indicator lights (mounted on circuit board)
- Control/alarm power indicator light (mounted on circuit board)

Power supply

- Pumps-120/208/240V, 7-15FLA
- Alarm-120V

Standard alarm package

- Red alarm beacon provides 360 visual check of alarm condition
- Exterior horn test/normal/silence switch allows alarm horn to be silenced and testing of horn and light to ensure proper operation of alarm system
- Horn silence relay automatically resets alarm after alarm condition has been resolved (mounted on circuit board)
- Alarm horn provides audio warning (83 to 85 decibel rating)

Warranty for Defects in Material and Workmanship

- AC-CP-D-C - 3 Years

AutoCad dwg files at www.quanics.net

1-877-QUANICS - www.quanics.net

Quanics
Engineering Water Solutions®

© 2007, Quanics Inc. All rights reserved.
Product(s) covered by one or more U.S.
and/or International patents. Other U.S. and
International patents may be pending.

DOWNLOAD
AutoCAD
DRAWINGS