
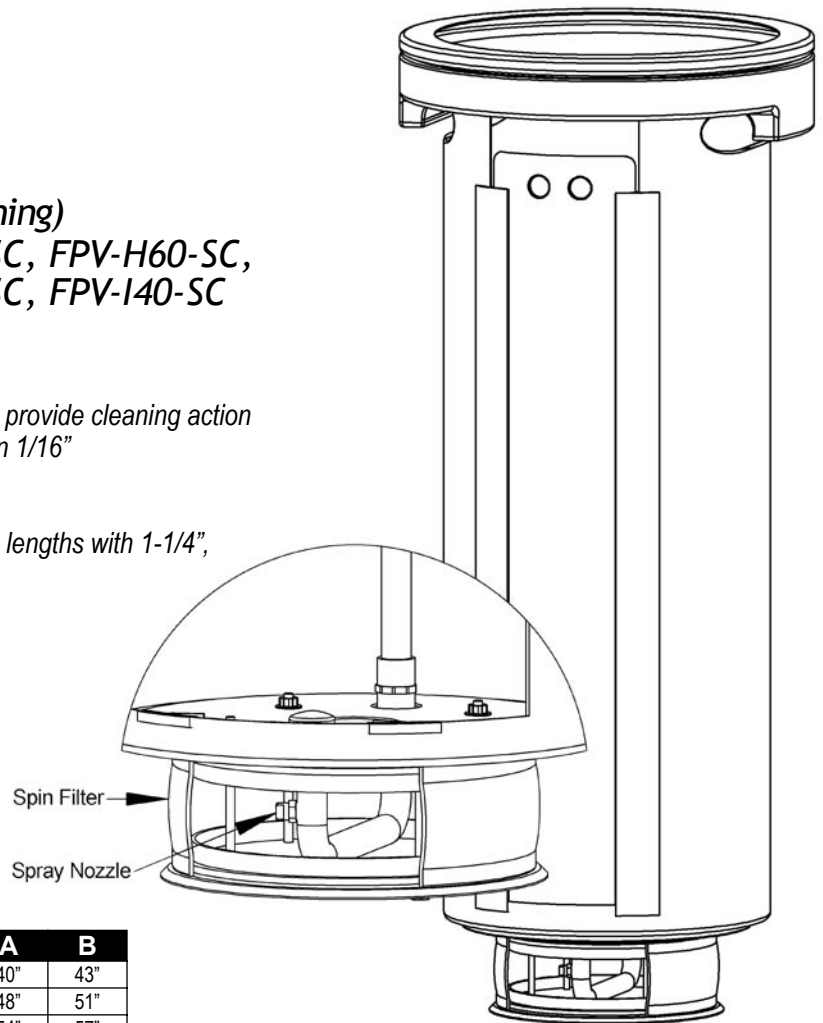


Filtered Pump Vaults (Self Cleaning)

FPV-H40-SC, FPV-H48-SC, FPV-H54-SC, FPV-H60-SC,
FPV-H66-SC, FPV-H72-SC, FPV-H96-SC, FPV-I40-SC

Features

- Hanging filtered pump vault with self-cleaning filter
- Patented self-cleaner diverts effluent from discharge to provide cleaning action
- Protects pump and disposal field from solids larger than 1/16"
- Virtually maintenance free
- Requires 8 psi head pressure for proper operation
- Available in 40", 48", 54", 60", 66", 72" and 96" hanging lengths with 1-1/4", 1-1/2", and 2" discharges

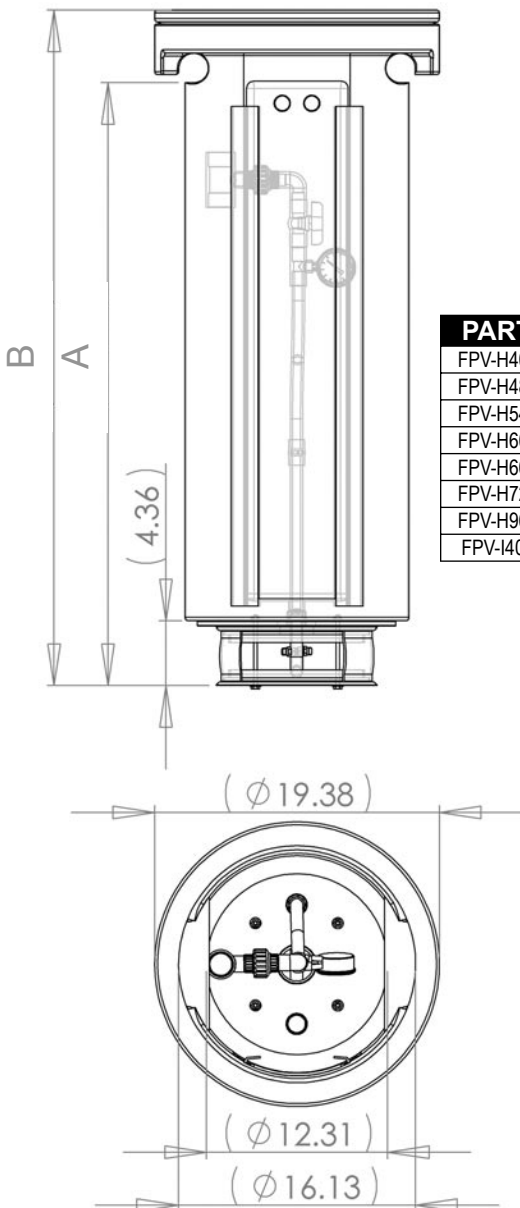

PART	A	B
FPV-H40-SC	40"	43"
FPV-H48-SC	48"	51"
FPV-H54-SC	54"	57"
FPV-H60-SC	60"	63"
FPV-H66-SC	66"	69"
FPV-H72-SC	72"	75"
FPV-H96-SC	96"	99"
FPV-I40-SC	40"	43"

Materials

- Vault
- High density non-corrosive polyethylene plastic
- Stainless steel screws

Effluent discharge assembly

- 1/2" PVC return line
- 0-30 psi pressure gauge
- 1/2" ball valve

Self-cleaning filter

- High density polyethylene

Warranty for Defects in Material and Workmanship

- 1 Year

AutoCad dwg files at www.quanics.net

1-877-QUANICS - www.quanics.net

Quanics
Engineering Water Solutions®

© 2007, Quanics Inc. All rights reserved.
Product(s) covered by one or more U.S.
and/or International patents. Other U.S. and
International patents may be pending.

DOWNLOAD
AutoCAD
DRAWINGS