
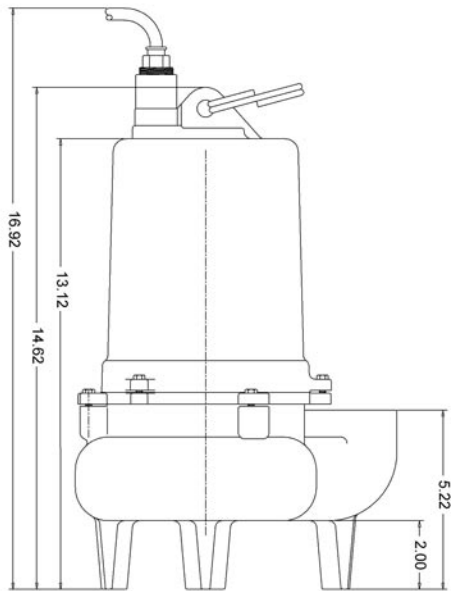


Pumps (Effluent) P-SS-12T

Features

- Class 30 cast iron construction
- Carbon/ceramic mechanical seal
- Piggy-back style float for automatic or manual operation
- Oil-filled motor with automatic reset overload provides safe operation
- Ball bearing construction for long life
- Designed for septic effluent applications

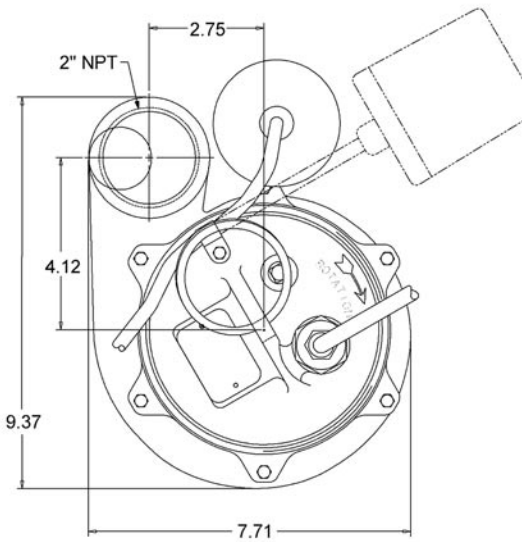

Specifications

Capacities: 128 GPM @ 10' head

Heads: To 23'

Motor: 1/2 HP (1550 RPM); Shaded pole with thermal overload

Electrical: 115V, 13.0FLA, 1Ph, 60Hz

Operation: Tethered float

Impeller: Thermoplastic, vortex type

Solids handling: 2" (50.8mm)


Power cord: 10' (3M) 16-3, SJTW-A/SJTW

Discharge: 2"

Warranty for Defects in Material and Workmanship

- 3 Years

AutoCad dwg files at www.quanics.net

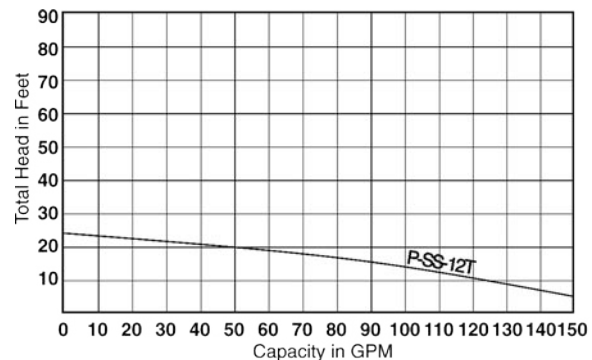

1-877-QUANICS - www.quanics.net

Quanics
Engineering Water Solutions®

© 2007, Quanics Inc. All rights reserved.
Product(s) covered by one or more U.S.
and/or International patents. Other U.S. and
International patents may be pending.

DOWNLOAD
AutoCAD
DRAWINGS